



Submittal Data Sheet

1.5 Ton Wall Mount - R-32

FTXV18AVJU9

FEATURES

- 12 Year limited Warranty for Parts and Compressor
- Sound pressure as low as 19 dB(A)
- Washable Dry Filter
- Powerful Operation mode
- Auto fan speed control
- Quick warming function

BENEFITS

- Quiet operation
- Low ambient cooling operation down to -4°F (-20°C) with field setting and air adjustment grille
- Operating Range - Cooling (50°F - 114.8°F)
- Operating Range - Heating (-13°F - 64.4°F)
- 12 year limited parts and compressor warranty with online registration
- 5 year limited parts warranty for commercial applications
- Factory Installed Wi-Fi module - Simple App Set up





Submittal Data Sheet

1.5 Ton Wall Mount - R-32

FTXV18AVJU9

ELECTRICAL		PIPING	
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.	*208-230 / 60 / 1	Gas Connection: (inch)	1/2
		Liquid Connection: (inch)	1/4
		Drain Connection: (inch)	5/8
SPECIFICATIONS			
COOLING - Airflow Rate (cfm):		COOLING - Sound Level (dBA):	
High:	565	High:	48
Med:	463	Med:	43
Low:	378	Low:	38
SuperLow:	335	SuperLow:	33
Dimensions (HxWxD) (in):		Net Weight (lb):	
11-5/8 x 39 x 10-3/8		27	

Submittal Data Sheet


1.5 Ton Wall Mount - R-32

FTXV18AVJU9


DIMENSIONAL DRAWING

FTXV15/18AVJU9



THE MARK (→) SHOWS PIPING DIRECTION




※NOTE: INCLUDING MOUNTING PLATE
10-7/16(265 mm)
10-3/8(263 mm)

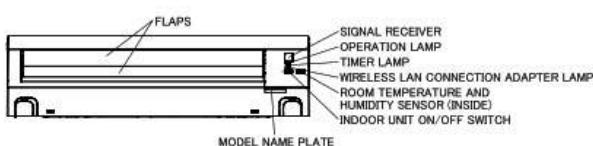


REQUIRED SPACE

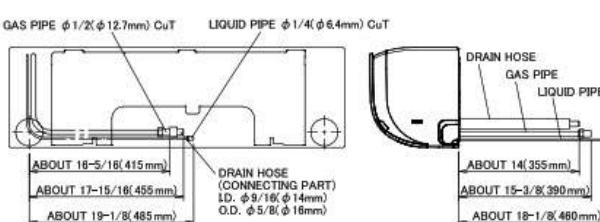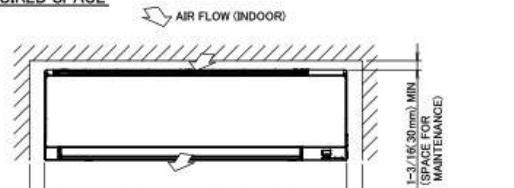


WIRELESS REMOTE CONTROLLER (ARC480A83)



BLADE ANGLE



STANDARD LOCATIONS OF WALL HOLES

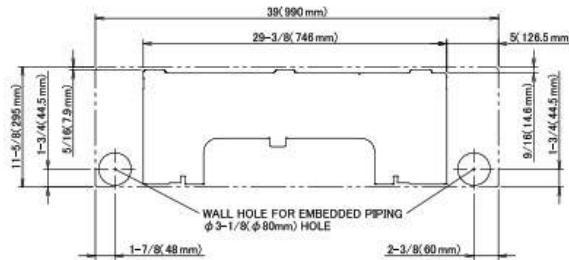

3D150966A