

5 Port Heat Pump, Ductless ODU 4 Ton 5MXS48WVJU9

FEATURES

High-efficiency inverter driven swing compressor

BENEFITS

12 Year limited parts warranty with online registration



Page 1 of 4



5 Port Heat Pump, Ductless ODU 4 Ton 5MXS48WVJU9

EFFICIENCY				PERFORMANCE				
	SEER2	EER2	HSPF2	COP	COOLING:		HEATING:	
Non-Ducted:	20.60	10.50	9.30	3.90	Rated (Btu/hr):	47,000	Rated (Btu/hr):	48,500
Ducted:	14.50	8.20	7.80	3.00	Operating Range:	14°F - 115°F	Operating Range:	5°F - 60°F
Mixed:	17.55	9.35	8.55	3.45	Rated Cooling Conditions:		Rated Heating Conditions:	
					Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75		Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43	

ELECTRICAL		PIPING			
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.	*208-230 / 60 / 1	Max. System Piping Length: (feet):	268	Gas Conn. (inch):	3/8
System MCA: (Min.circuit amps)	30.8	Max. Interunit Piping Length: (feet):	268	Liquid Conn. (inch):	1/4
System MFA: (Max.fuse amps)	35.0	Max. Height Difference IDU to ODU (feet):	49.25	Drain Conn. (inch):	1
Compressor RLA: (Rated load amps)	27.0	Max. Height Difference IDU to IDU (feet):	98		
Outdoor fan motor FLA: (Full load amps)	0.8	Refrigerant Pre-Charged Pipe Length (ft):	131.2		
Outdoor fan motor W: (Rated output watts)					

SPECIFICATIONS				
Compressor Type:	Swing	Compressor Stage:	Inverter	
Refrigerant Type:		Refrigerant Oil:	PVE (FVC50K)	
Factory Charge (Lbs):	8.60	Additional Refrigerant Charge (Ozs/ft):	0.21	
COOLING - Airflow Rate (cfm):		HEATING - Airflow Rate (cfm):		
High:	3,684	High:	3,356	
Med:	3,029	Med:	3,138	
Low:	2,756	Low:	1,500	
Sound Level (dBA):	53	Sound Level (dBA):	55	
Dimensions (HxWxD) (in): 34-1/4 x 43-5/16 x 18-1/8		Net Weight (lb):	216	

Daikin North America LLC, 19001 Kermier Rd, Waller, TX 77484

www.daikinac.com www.daikincomfort.com

Daikin City Generated Submittal Data

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Date: 3/17/2024 5:34:27 AM


Page 2 of 4



5 Port Heat Pump, Ductless ODU 4 Ton 5MXS48WVJU9

DIMENSIONAL DRAWING

5MXS48WVJU9

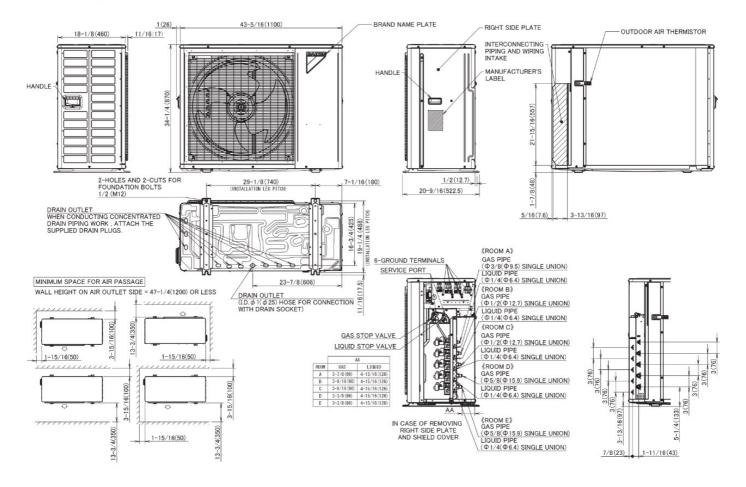

Page 3 of 4



5 Port Heat Pump, Ductless ODU 4 Ton 5MXS48WVJU9

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
DACA-WB-3	Powder-Coated Wall-Mounted Bracket	No
KEH082A41A	Daikin TBM Drain Pan Heater 4MXL, 5MXS	No
KKG082A41	Back protection wire net 4MXL, 5 MXS	No
KPW082A41	Air direction adjustment grille	No