



## Submittal Data Sheet

1 Ton Wall Mount R-32

FTXV12AVJU9

### FEATURES

- 12 Year limited Warranty for Parts and Compressor
- Sound pressure as low as 19 dB(A)
- Washable Dry Filter
- Powerful Operation mode
- Auto fan speed control
- Quick warming function

### BENEFITS

- Quiet operation
- Low ambient cooling operation down to -4°F (-20°C) with field setting and air adjustment grille
- Operating Range - Cooling (50°F - 114.8°F)
- Operating Range - Heating (-13°F - 64.4°F)
- 12 year limited parts and compressor warranty with online registration
- 5 year limited parts warranty for commercial applications
- Factory Installed Wi-Fi module - Simple App Set up





## Submittal Data Sheet

1 Ton Wall Mount R-32

FTXV12AVJU9

### ELECTRICAL

Power Supply (V/Hz/Ph):  
\*See Engineering Manuals for other voltages.

\*208-230 / 60 / 1

### PIPING

Gas Connection: (inch)

3/8

Liquid Connection: (inch)

1/4

Drain Connection: (inch)

5/8

### SPECIFICATIONS

COOLING - Airflow Rate (cfm):		COOLING - Sound Level (dBA):		HEATING - Airflow Rate (cfm):		HEATING - Sound Level (dBA):	
High:	392	High:	45	High:	438	High:	45
Med:	293	Med:	37	Med:	318	Med:	37
Low:	226	Low:	31	Low:	240	Low:	30
SuperLow:	166	SuperLow:	19	SuperLow:	205	SuperLow:	26
Dimensions (HxWxD) (in):		11-1/4 x 30-5/16 x 8-3/4		Net Weight (lb):		19	

## Submittal Data Sheet




1 Ton Wall Mount R-32

FTXV12AVJU9


## DIMENSIONAL DRAWING

CTXV07AVJU9, FTXV09/12AVJU9


THE MARK (→) SHOWS PIPING DIRECTION

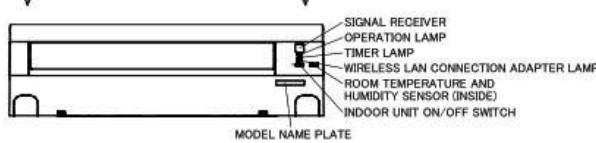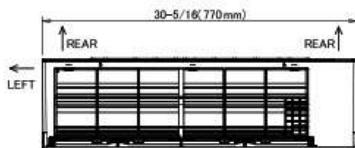

### WIRELESS REMOTE CONTROLLER (ARC480A83)




### BLADE ANGLE




### RIGHT / LEFT (MANUAL)



### REQUIRED SPACE

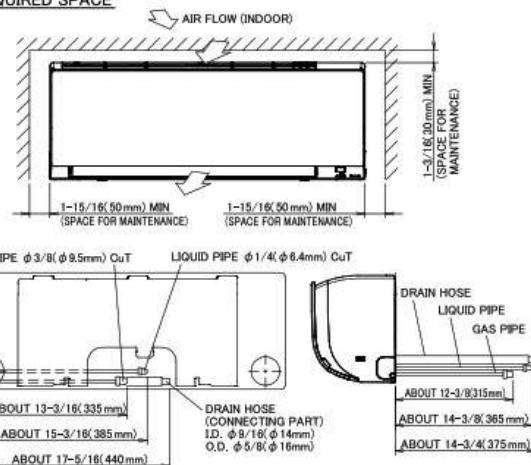

### STANDARD LOCATIONS OF WALL HOLES

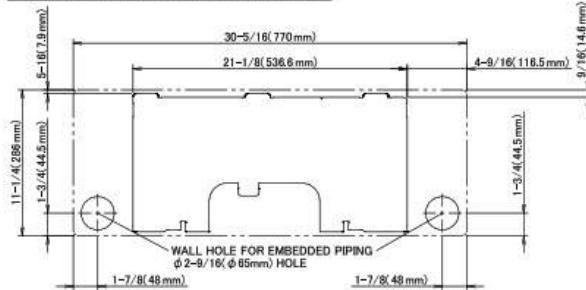

3D150958A