

Daikin AURORA 2.0-Ton Wall Mounted Unit FTX24WVJU9RXL24WMVJU9

FEATURES

- Hot start technology
- Auto-restart (after power failure)
- IR controller included

INDOOR UNIT



BENEFITS

- Quiet operation
- Low ambient cooling operation down to -4°F (-20°C) with field setting and air adjustment grille
- Operating Range Cooling (50°F 114.8°F)
- Operating Range Heating (-13°F 64.4°F)
- 12 year limited parts and compressor warranty with online registration
- 5 year limited parts warranty for commercial applications

OUTDOOR UNIT





Daikin AURORA 2.0-Ton Wall Mounted Unit FTX24WVJU9RXL24WMVJU9

SYSTEM PERFORMANCE			
Indoor Unit Model No.	FTX24WVJU9	Indoor Unit Name:	2.0 Ton Wall Mounted Daikin AURORA Indoor Unit
Outdoor Unit Model No.	RXL24WMVJU9	Outdoor Unit Name:	19.5 SEER2, Heat Pump, Ductless ODU, 2.0 Ton, Daikin AURORA
Rated Cooling Capacity (Btu/hr):	21,200	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):		Rated Piping Length(ft):	25
Max/Min Cooling Capacity (Btu/hr):	25,800 / 9,000	Rated Height Difference (ft):	0.00
Cooling Input Power (kW):			
SEER2 (Non-Ducted/Ducted):	19.50 /	HSPF2 (Non-Ducted/Ducted):	8.5 /
EER2 (Non-Ducted/Ducted):	11.50 /	Heating COP (Non-Ducted/Ducted):	3.1 /
Rated Heating Capacity (Btu/hr):	24,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Max/Min Heating Capacity (Btu/hr):	32,000 / 9,000		


SYSTEM DETAILS			
Refrigerant Type:	R-410A	Cooling Operation Range (°F DB):	50 - 115
Holding Refrigerant Charge (lbs):	3.53	Heating Operation Range (°F WB):	-13 - 60
Additional Charge (lb/ft):	0.32	Max. Pipe Length (Vertical) (ft):	66
Pre-charge Piping (Length) (ft):	33	Cooling Range w/Baffle (°F DB):	-
Max. Pipe Length (Total) (ft):	99		
Max Height Separation (Ind to Ind ft):	0		



Daikin AURORA 2.0-Ton Wall Mounted Unit FTX24WVJU9RXL24WMVJU9

INDOOR UNIT DETAILS			
Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Airflow Rate (H/M/L/SL) (CFM):	643/494/350/328
Power Supply Connections:	L1, L2, L3, Ground	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):		Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):		Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	13-3/8 x 41-5/16 x 10-3/16	Condensate Connection (inch):	5/8
Net Weight (lb):	33	Sound Pressure (H/M/L/SL) (dBA):	51/44/37/34
Ext. Static Pressure (Rated/Max) (inWg):	I	Sound Power Level (dBA):	

DIMENSIONAL DRAWING - INDOOR UNIT

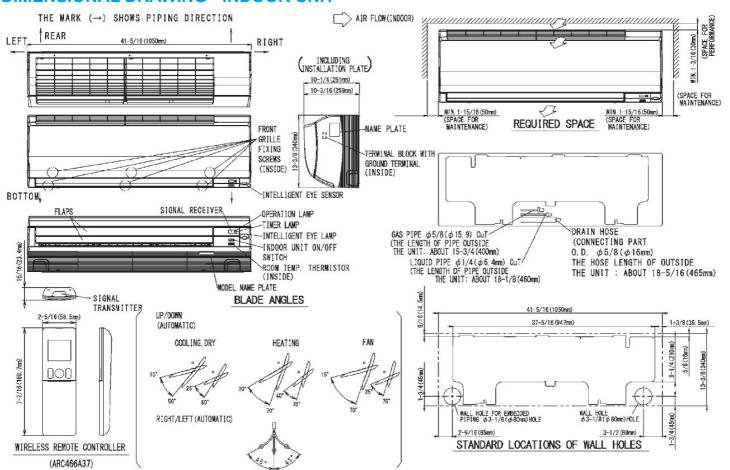

C: 3D123383

Daikin North America LLC, 19001 Kermier Rd, Waller, TX 77484




Daikin AURORA 2.0-Ton Wall Mounted Unit FTX24WVJU9RXL24WMVJU9

OUTDOOR UNIT DETAILS				
Power Supply (V/Hz/Ph):	208/230 V 254/277 / 60 / 1	Compressor Stage:	Inverter	
Power Supply Connections:	L1, L2, L3, Ground	Capacity Control Range (%):	-	
Min. Circuit Amps MCA (A):	18.8	Airflow Rate (H) (CFM):	2419	
Max Overcurrent Protection (MOP) (A):		Gas Pipe Connection (inch):	5/8	
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	1/4	
Rated Load Amps RLA(A):		Sound Pressure (H) (dBA):	55	
Dimensions (HxWxD) (in):	28-15/16 x 34-1/4 x 12-5/8	Sound Power Level (dBA):		
Net Weight (lb):	132			

DIMENSIONAL DRAWING - OUTDOOR UNIT

RXL24WMVJU9

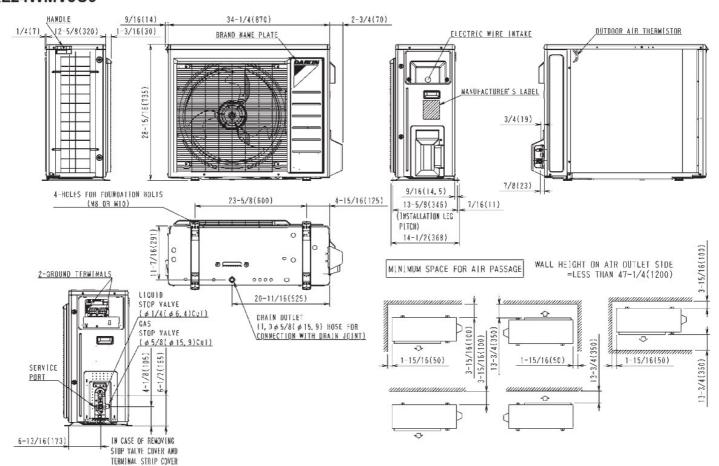

Daikin North America LLC, 19001 Kermier Rd, Waller, TX 77484

Daikin City Generated Submittal Data

www.daikinac.com www.daikincomfort.com



Daikin AURORA 2.0-Ton Wall Mounted Unit FTX24WVJU9RXL24WMVJU9

INDOOR ACCESSORIES

PART	
NUMBER	

DESCRIPTION

INCLUDED

AZAI6WSCDKB	DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21)	No
AZAI6WSPDKC	DKN Plus Interface	No
BRCW901A03	BRC944B2 CONTROL CABLE, 10FT	No
BRCW901A08	Wired Remote Controller Cord - 8m/26ft	No
DACA-CP1-1	Mini Aqua Condensate Pump	No
DACA-CP4-1	MINI WHITE PUMP KIT 100-250V	No
DTST-LTE-LA-A	Daikin One Lite (with Translation Adaptor for S21 only)	No
DTST-ONE-ADA-A	Daikin One+ Smart Thermostat for VRV, SkyAir, Single- and Multi-Zone System	No
KAF970A46	Titanium apatite photocatalytic air-purifying filter WITHOUT frame	No
KRP928BB2S	RA Interface Adaptor for DIII-Net -	No

OUTDOOR ACCESSORIES

P	Al	R	Γ		
N	U	M	В	Ē	R

DESCRIPTION

INCLUDED

FTDBHML	Daikin Bml Drainpan Htr Large	No
KEH063A4E	Daikin BML DrainPan Heater Large	No
KEH063A4EA	Bml LRg Drain Pan Heater Rev A	No
KKG063A42	Back protection wire net	No
KPS063A41	Snow hood (intake side plate) (15, 18 & 24)	No
KPS063A44	Snow hood (intake rear plate) (15,18 & 24)	No
KPS063A47	Snow hood (outlet) (15, 18 & 24)	No
KPW063B4	Air direction adjustment grille	No

Daikin North America LLC, 19001 Kermier Rd, Waller, TX 77484

Daikin City Generated Submittal Data

www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)