



Submittal Data Sheet

3/4 Ton Wall Mount R-32

FTXV09AVJU9

FEATURES

- 12 Year limited Warranty for Parts and Compressor
- Sound pressure as low as 19 dB(A)
- Washable Dry Filter
- Powerful Operation mode
- Auto fan speed control
- Quick warming function

BENEFITS

- Quiet operation
- Low ambient cooling operation down to -4°F (-20°C) with field setting and air adjustment grille
- Operating Range - Cooling (50°F - 114.8°F)
- Operating Range - Heating (-13°F - 64.4°F)
- 12 year limited parts and compressor warranty with online registration
- 5 year limited parts warranty for commercial applications
- Factory Installed Wi-Fi module - Simple App Set up





Submittal Data Sheet

3/4 Ton Wall Mount R-32

FTXV09AVJU9

ELECTRICAL		PIPING	
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.	*208-230 / 60 / 1	Gas Connection: (inch)	3/8
		Liquid Connection: (inch)	1/4
		Drain Connection: (inch)	5/8
SPECIFICATIONS			
COOLING - Airflow Rate (cfm):	COOLING - Sound Level (dBA):	HEATING - Airflow Rate (cfm):	HEATING - Sound Level (dBA):
High: 381	High: 43	High: 385	High: 41
Med: 272	Med: 35	Med: 304	Med: 35
Low: 230	Low: 31	Low: 230	Low: 28
SuperLow: 166	SuperLow: 24	SuperLow: 194	SuperLow: 25
Dimensions (HxWxD) (in):	11-1/4 x 30-5/16 x 8-3/4	Net Weight (lb):	19

Submittal Data Sheet




3/4 Ton Wall Mount R-32

FTXV09AVJU9


DIMENSIONAL DRAWING

CTXV07AVJU9, FTXV09/12AVJU9


THE MARK (→) SHOWS PIPING DIRECTION

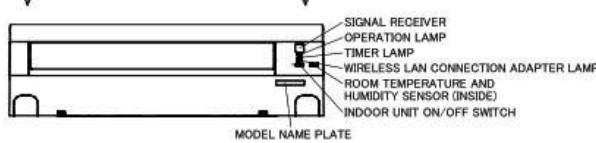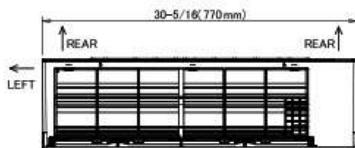


WIRELESS REMOTE CONTROLLER (ARC480A83)




BLADE ANGLE



REQUIRED SPACE

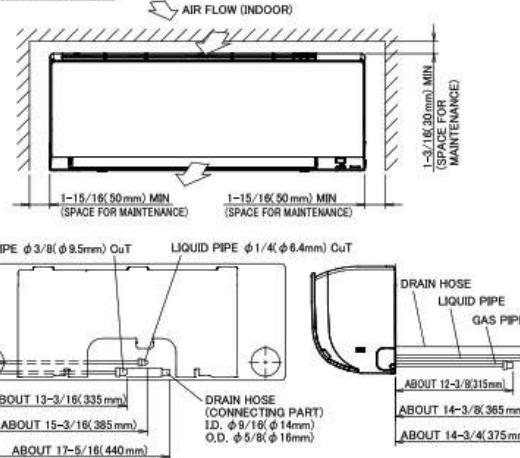

STANDARD LOCATIONS OF WALL HOLES

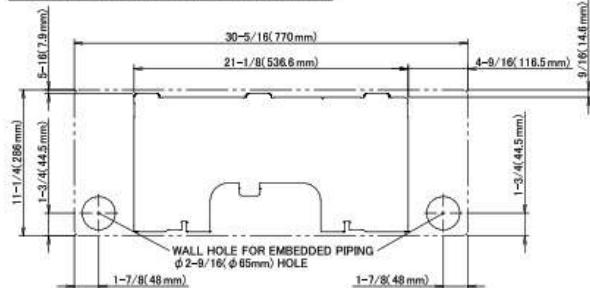

3D150958A