



## Submittal Data Sheet

Daikin ATMOSPHERA 2.0-Ton Wall Mounted Heat Pump System  
FTXM24VVJU9RXM24VVJU9

### FEATURES

- Daikin Swing Compressor
- Quiet Operation
- Simplified Maintenance - Easy Drain Pan removal
- Built In WiFi for easy control
- Intelligent Eye
- Hybrid Cooling - dehumidifies even in low cooling loads
- Enhanced Cooling and Heating Capacity - 100% heating Capacity at 5F; 100% Cooling at 115F

### BENEFITS

- 12 Year limited parts and compressor warranty
- Included WiFi and Handheld controller
- Precharged to 49'
- R-32 Refrigerant for low GWP and lower Carbon impact

### INDOOR UNIT



### OUTDOOR UNIT





## Submittal Data Sheet

Daikin ATMOSPHERA 2.0-Ton Wall Mounted Heat Pump System  
FTXM24WVJU9RXM24WVJU9

### SYSTEM PERFORMANCE

Indoor Unit Model No.	FTXM24WVJU9	Indoor Unit Name:	Daikin ATMOSPHERA 2.0-Ton, Heat Pump, Wall Mounted IDU
Outdoor Unit Model No.	RXM24WVJU9	Outdoor Unit Name:	Daikin ATMOSPHERA 2.0-Ton, Heat Pump, Ductless ODU
Rated Cooling Capacity (Btu/hr):	21,600	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):		Rated Piping Length(ft):	25
Max/Min Cooling Capacity (Btu/hr):	26,000 / 9,000	Rated Height Difference (ft):	0.00
Cooling Input Power (kW):	1.800	Heating Input Power (kW):	1.99
SEER2 (Non-Ducted/Ducted):	22.00 /	HSPF2 (Non-Ducted/Ducted):	10.0 /
EER2 (Non-Ducted/Ducted):	12.00 /	Heating COP (Non-Ducted/Ducted):	3.5 /
Rated Heating Capacity (Btu/hr):	24,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Max/Min Heating Capacity (Btu/hr):	32,000 / 9,000		

### SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	50 - 115
Holding Refrigerant Charge (lbs):	2.98	Heating Operation Range (°F WB):	-13 - 64
Additional Charge (oz/ft):	0.22	Max. Pipe Length (Vertical) (ft):	82
Pre-charge Piping (Length) (ft):	49	Cooling Range w/Baffle (°F DB):	-
Max. Pipe Length (Total) (ft):	99		
Max Height Separation (Ind to Ind ft):	0		

## Submittal Data Sheet


Daikin ATMOSPHERA 2.0-Ton Wall Mounted Heat Pump System  
FTXM24WVJU9RXM24WVJU9

### INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Airflow Rate (H/M/L/SL) (CFM):	844/653/498/452
Power Supply Connections:	1, 2, 3, Ground	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	Powered by CU - See Condenser for Electrical Information	Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):	Powered by CU - See Condenser for Electrical Information	Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	11-3/4 x 43-5/16 x 10-13/16	Condensate Connection (inch):	5/8
Net Weight (lb):	33	Sound Pressure (H/M/L/SL) (dBA):	51/44/37/34

### DIMENSIONAL DRAWING - INDOOR UNIT

#### FTXM24WVJU9

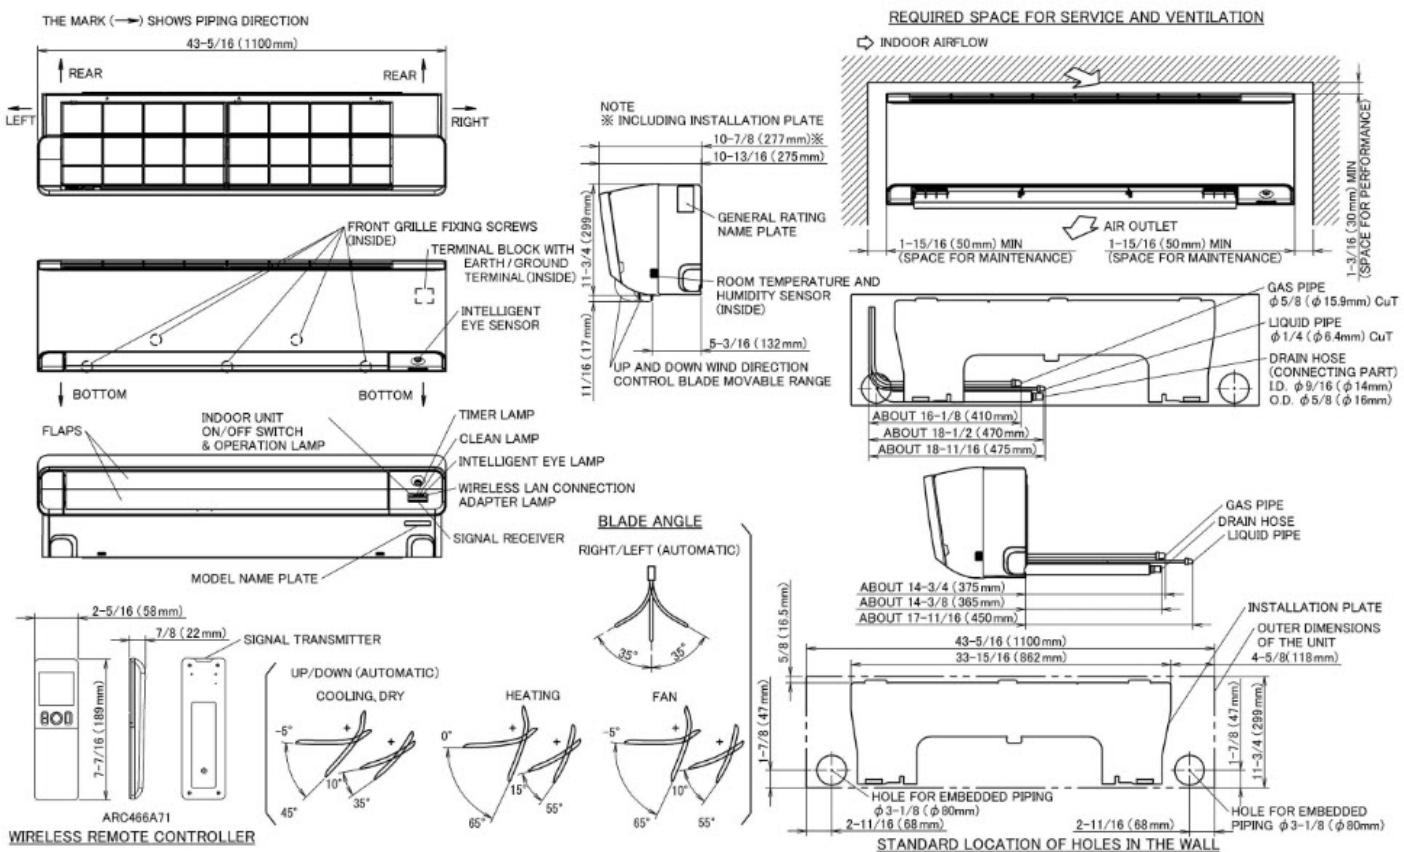

## Submittal Data Sheet

Daikin ATMOSPHERA 2.0-Ton Wall Mounted Heat Pump System

FTXM24WVJU9RXM24WVJU9

### OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Compressor Stage:	Inverter
Power Supply Connections:	L1, L2, Ground	Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	19.8	Airflow Rate (H/L) (CFM):	2179/1,833
Max Overcurrent Protection (MOP) (A):	20	Gas Pipe Connection (inch):	5/8
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	1/4
Rated Load Amps RLA(A):	19.25	Sound Pressure (H) (dBA):	55
Dimensions (HxWxD) (in):	28-15/16 x 34-1/4 x 12-5/8	Sound Power Level (dBA):	
Net Weight (lb):	132		

### DIMENSIONAL DRAWING - OUTDOOR UNIT

**RXM24WVJU9**

