




## Submittal Data Sheet

28 ton, 460V, VRV IV X HR

REYQ336XBYDA

### FEATURES

- Compatible with Low Temperature (LT) Hydrobox and EEV Kit for DOAS with hot gas reheat capability
- Industry's first 3 phase VRF system to integrate with communicating gas furnaces.
- Design flexibility to enlarge system from single to dual module or dual to triple module without changes to installed main pipe sizes.
- Engineered with Daikin vapor injection compressor for optimized part load efficiencies.
- Hot gas defrost circuit with improved control logic allows installation without base pan heater.
- New service window provides quick access to multi-functional display and configuration buttons.
- Multi-functional display provides refrigerant pressures and temperatures eliminating the need to connect gauges during regular maintenance check.
- Easy commissioning with ability to program settings off site using configurator tool.
- Assembled in the US to increase flexibility and reduce lead times.
- Standard Limited Warranty: 10-year limited parts warranty.

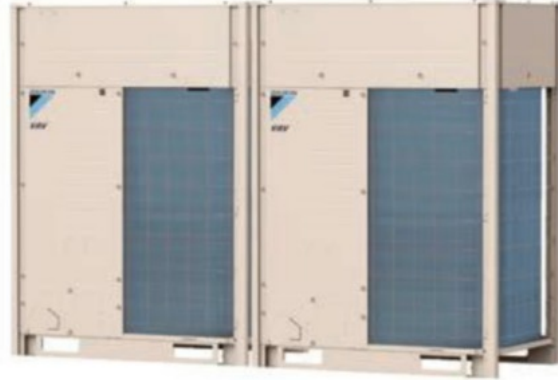

### BENEFITS

- Choice of gas furnace or heat pump heating for optimizing operational costs based on utility cost.
- Engineered to optimize capital on phased & tenant fit out commercial buildings.
- Year round comfort and energy savings with Variable Refrigerant Temperature technology (VRT).
- Modular and lightweight - enables flexibility in system layout and installation
- Corrosion resistance 1000hr salt spray tested Daikin PE blue fin heat exchanger
- Refrigerant cooled inverter technology keeps PCB cool independent of ambient temperature
- Field performable Intermittent outdoor fan operation to help minimize snow accumulation on fan blades when the system is off.
- Backwards compatible with T-series Branch Selector boxes



Submittal Data Sheet

28 ton, 460V, VRV IV X HR

REYQ336XBYDA

PERFORMANCE

Outdoor Unit Model No.	REYQ336XBYDA	Outdoor Unit Name:	28 ton, 460V, VRV IV X HR
Type:	Heat Recovery	Unit Combination:	REYQ168XBYDA(x2)
Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Rated Piping Length(ft):			
Rated Height Difference (ft):			
Rated Cooling Capacity (Btu/hr):	316,000	Rated Heating Capacity (Btu/hr):	280,000
Nom Cooling Capacity (Btu/hr):	330,000	Nom Heating Capacity (Btu/hr):	378,000
Cooling Input Power (kW):		Heating Input Power (kW):	
EER (Non-Ducted/Ducted):	9.20 / 9.00	Heating COP (Non-Ducted/Ducted):	3.3 / 3.2
IEER (Non-Ducted/Ducted):	17.80 / 16.00	Heating COP 17F (Non-Ducted/Ducted):	2.1 / 2.1
		SCHE (Non-Ducted/Ducted):	20.20 / 16.00

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	460 / 60 / 3	Compressor Stage:	Inverter
Power Supply Connections:	L1, L2, L3, Ground	Capacity Control Range (%):	6 - 100
Min. Circuit Amps MCA (A):	31.1 + 31.1	Capacity Index Limit:	-
Max Overcurrent Protection (MOP) (A):	40 + 40	Airflow Rate (H) (CFM):	9480
Max Starting Current MSC(A):		Gas Pipe Connection (inch):	1-3/8
Rated Load Amps RLA(A):		Liquid Pipe Connection (inch):	3/4
Dimensions (Height) (in):	66-11/16	H/L Pressure Connection (inch)	1-1/8
Dimensions (Width) (in):	48-7/8		
Dimensions (Depth) (in):	30-3/16	Sound Pressure (H) (dBA):	68
Net Weight (lb):	793 + 793	Sound Power Level (dBA):	
		Max. No. of Indoor Units:	58

## Submittal Data Sheet


28 ton, 460V, VRV IV X HR

REYQ336XBYDA

### SYSTEM DETAILS

Refrigerant Type:	R-410A	Cooling Operation Range (°F DB):	23 - 122
Holding Refrigerant Charge (lbs):	25.8	Heating Operation Range (°F WB):	-13 - 60
Additional Charge (oz/ft):		Max. Pipe Length (Vertical) (ft):	164
Pre-charge Piping (Length) (ft):		Cooling Range w/Baffle (°F DB):	-
Max. Pipe Length (Total) (ft):	540		
Max Height Separation (Ind to Ind ft):	98		

### DIMENSIONAL DRAWING

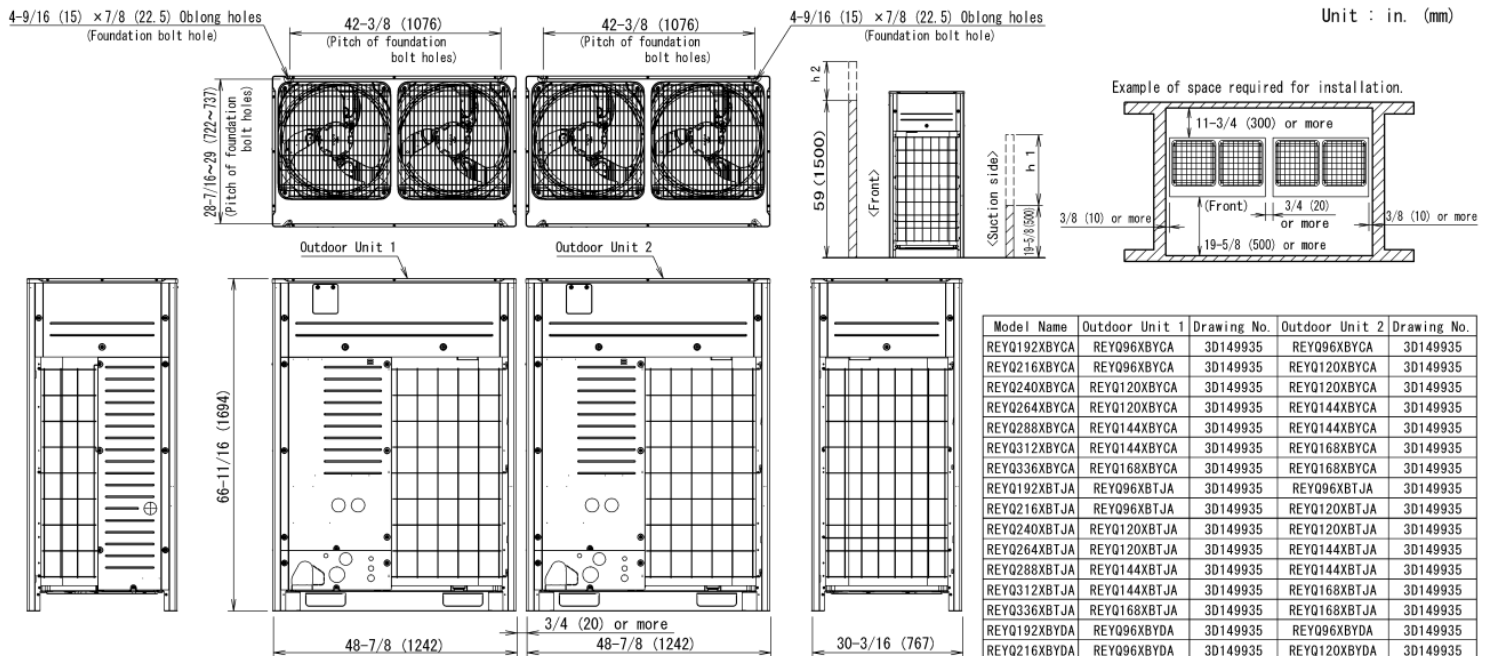

#### Notes :

- Heights of walls of this example:  
Front : 59 in. (1500mm)  
Suction side : 19-5/8 in. (500mm)  
Side : Height unrestricted  
The installation space shown in this figure is based on the condition of cooling operation at the outdoor air temperature of 95°FDB (35°CDB).  
The installation space of suction side shown above must be expanded in the following case.  
- Design outdoor temperature becomes over 95°FDB (35°CDB).  
- Operating over max. operating load (In case of causing a heavy heating load at indoor unit side)  
2. If the above wall heights are exceeded then "h2"/2 and "h1"/2 should be added to the front and suction side service spaces respectively as shown in the following figure.  
3. When installing the units the most appropriate pattern should be selected from "Installation and repair space drawing" in order to obtain the best fit in the space available always bearing in mind the need to leave enough room for a person to pass between units and wall and for the air to circulate freely.  
(If more units are to be installed than are shown in "Installation and repair space drawing", your layout should take account of the possibility of short circuiting.)  
4. The units should be installed to leave sufficient space at the front for the on site refrigerant piping work to be carried out comfortably.

Model Name	Outdoor Unit 1	Drawing No.	Outdoor Unit 2	Drawing No.
REYQ192XBYCA	REYQ96XBYCA	3D149935	REYQ96XBYCA	3D149935
REYQ216XBYCA	REYQ96XBYCA	3D149935	REYQ120XBYCA	3D149935
REYQ240XBYCA	REYQ120XBYCA	3D149935	REYQ120XBYCA	3D149935
REYQ264XBYCA	REYQ120XBYCA	3D149935	REYQ144XBYCA	3D149935
REYQ288XBYCA	REYQ144XBYCA	3D149935	REYQ144XBYCA	3D149935
REYQ312XBYCA	REYQ144XBYCA	3D149935	REYQ168XBYCA	3D149935
REYQ336XBYCA	REYQ168XBYCA	3D149935	REYQ168XBYCA	3D149935
REYQ192XBTJA	REYQ96XBTJA	3D149935	REYQ96XBTJA	3D149935
REYQ216XBTJA	REYQ96XBTJA	3D149935	REYQ120XBTJA	3D149935
REYQ240XBTJA	REYQ120XBTJA	3D149935	REYQ120XBTJA	3D149935
REYQ264XBTJA	REYQ120XBTJA	3D149935	REYQ144XBTJA	3D149935
REYQ288XBTJA	REYQ144XBTJA	3D149935	REYQ144XBTJA	3D149935
REYQ312XBTJA	REYQ144XBTJA	3D149935	REYQ168XBTJA	3D149935
REYQ336XBTJA	REYQ168XBTJA	3D149935	REYQ168XBTJA	3D149935
REYQ192XBYDA	REYQ96XBYDA	3D149935	REYQ96XBYDA	3D149935
REYQ216XBYDA	REYQ96XBYDA	3D149935	REYQ120XBYDA	3D149935
REYQ240XBYDA	REYQ120XBYDA	3D149935	REYQ120XBYDA	3D149935
REYQ264XBYDA	REYQ120XBYDA	3D149935	REYQ144XBYDA	3D149935
REYQ288XBYDA	REYQ144XBYDA	3D149935	REYQ144XBYDA	3D149935
REYQ312XBYDA	REYQ144XBYDA	3D149935	REYQ168XBYDA	3D149935
REYQ336XBYDA	REYQ168XBYDA	3D149935	REYQ168XBYDA	3D149935
RELQ144TBYCA	RELQ72TBYCA	3D149935	RELQ72TBYCA	3D149935
RELQ192TBYCA	RELQ96TBYCA	3D149935	RELQ96TBYCA	3D149935
RELQ240TBYCA	RELQ120TBYCA	3D149935	RELQ120TBYCA	3D149935
RELQ144TBTJA	RELQ72TBTJA	3D149935	RELQ72TBTJA	3D149935
RELQ192TBTJA	RELQ96TBTJA	3D149935	RELQ96TBTJA	3D149935
RELQ240TBTJA	RELQ120TBTJA	3D149935	RELQ120TBTJA	3D149935
RELQ144TBYDA	RELQ72TBYDA	3D149935	RELQ72TBYDA	3D149935
RELQ192TBYDA	RELQ96TBYDA	3D149935	RELQ96TBYDA	3D149935
RELQ240TBYDA	RELQ120TBYDA	3D149935	RELQ120TBYDA	3D149935