



**Submittal Data Sheet**

R-32 --- 1-Ton Wall Mounted Daikin OTERRA Cooling Only System  
FTKF12AXVJU-RKF12AXVJU

**FEATURES**

- Daikin Swing Compressor
- Indoor Quiet Operation
- Included Handheld Remote
- Titanium Apatite Air-Purifying Filter
- Anti-corrosion Treatment of Outdoor Heat Exchanger

**INDOOR UNIT**



**BENEFITS**

- R-32 Easy, Proven, Efficient, Available
- Precharged for up to 33 ft
- Cooling Operation Range - 50-118F for 9K/12K 50-122F for 18/24K
- 12 Year Parts and Compressor Registered Residential Warranty
- 5 year Parts and Compressor Commercial Warranty
- Cooling down to -4F for Facilities

**OUTDOOR UNIT**





Submittal Data Sheet

R-32 --- 1-Ton Wall Mounted Daikin OTERRA Cooling Only System  
FTKF12AXVJU-RKF12AXVJU

SYSTEM PERFORMANCE

Indoor Unit Model No.	FTKF12AXVJU	Indoor Unit Name:	R-32 Daikin OTERRA 1 Ton AC only mini split indoor unit
Outdoor Unit Model No.	RKF12AXVJU	Outdoor Unit Name:	R-32 1 Ton, Cooling only, Ductless ODU Daikin OTERRA
Rated Cooling Capacity (Btu/hr):	12,000	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):	9,540	Rated Piping Length(ft):	25
Max/Min Cooling Capacity (Btu/hr):	14,600 / 4,400	Rated Height Difference (ft):	0.00
Cooling Input Power (kW):	3.520		
SEER2 (Non-Ducted/Ducted):	21.00 /		
EER2 (Non-Ducted/Ducted):	12.50 /		

SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	50 - 118
Holding Refrigerant Charge (lbs):	1.65		
Additional Charge (oz/ft):	0.18	Max. Pipe Length (Vertical) (ft):	49
Pre-charge Piping (Length) (ft):	33	Cooling Range w/Baffle (°F DB):	-4 - -4
Max. Pipe Length (Total) (ft):	66		
Max Height Separation (Ind to Ind ft):	0		



Submittal Data Sheet


R-32 --- 1-Ton Wall Mounted Daikin OTERRA Cooling Only System  
FTKF12AXVJU-RKF12AXVJU

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (HH/H/M/L/SL) (CFM):	473/436/316/247/132
Power Supply Connections:	1, 2, 3, Ground	Moisture Removal (Gal/hr):	0.2
Min. Circuit Amps MCA (A):	Powered by CU - See Condenser for Electrical Information	Gas Pipe Connection (inch):	3/8
Max Overcurrent Protection (MOP) (A):	Powered by CU - See Condenser for Electrical Information	Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	11-1/3 x 30-5/16 x 9-3/16	Condensate Connection (inch):	5/8
Net Weight (lb):	20.9	Sound Pressure (H/M/L/SL) (dBA):	46/38/32/19

DIMENSIONAL DRAWING - INDOOR UNIT

Model : FTKF09/12A, FTXF09/12A

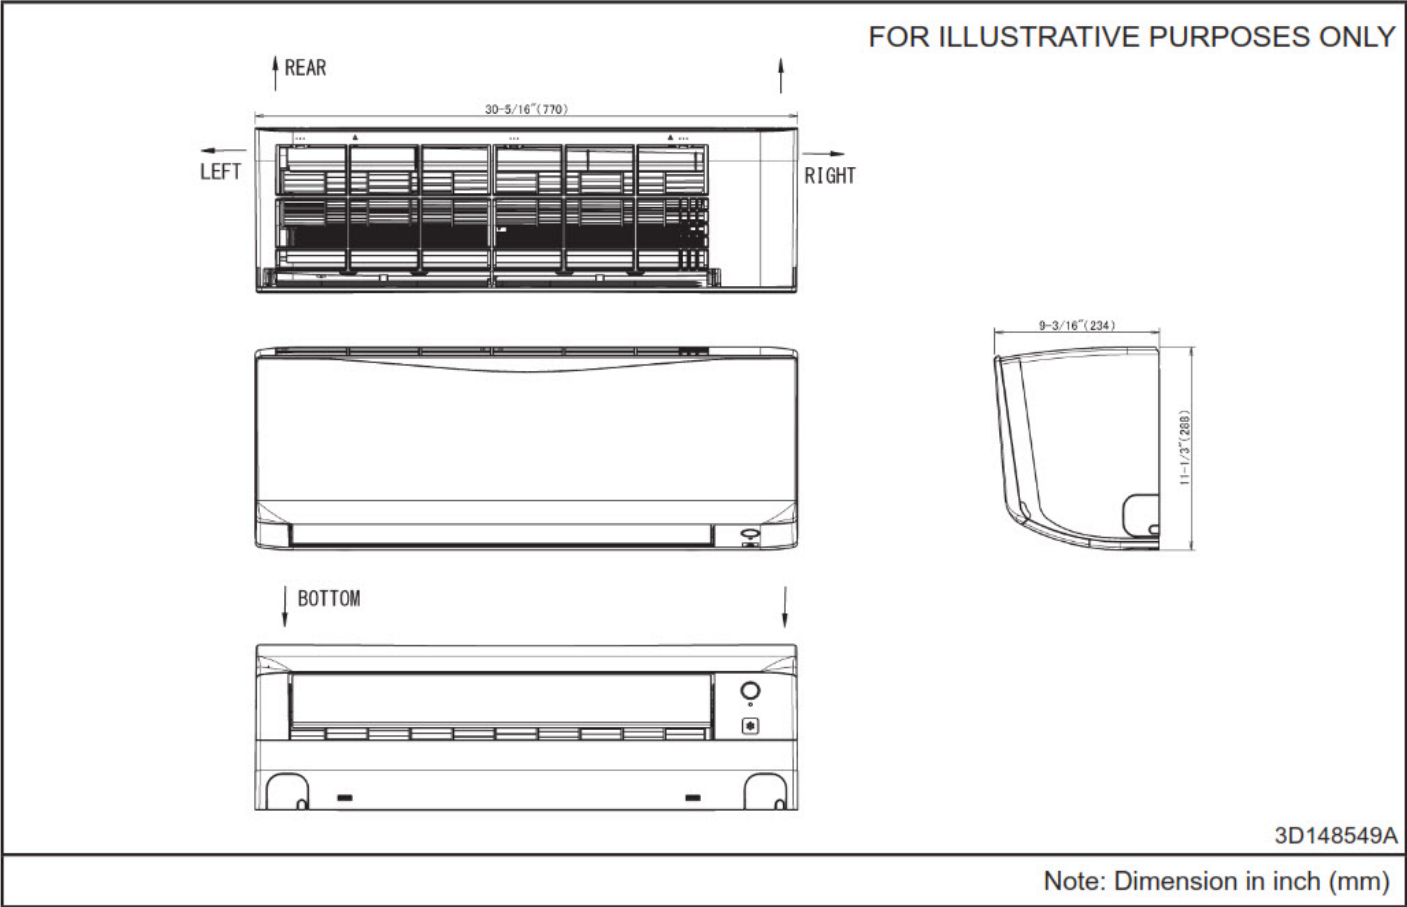

# Submittal Data Sheet

R-32 --- 1-Ton Wall Mounted Daikin OTERRA Cooling Only System  
FTKF12AXVJU-RKF12AXVJU

## OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Compressor Stage:	Inverter
Power Supply Connections:	L1, L2, Ground	Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	9.15	Airflow Rate (H) (CFM):	1051
Max Overcurrent Protection (MOP) (A):	15	Gas Pipe Connection (inch):	3/8
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	1/4
Rated Load Amps RLA(A):		Sound Pressure (H) (dBA):	49
Dimensions (HxWxD) (in):	21-11/16 x 26-1/2 x 11-3/16	Sound Power Level (dBA):	
Net Weight (lb):	60		

## DIMENSIONAL DRAWING - OUTDOOR UNIT

Model : RKF09/12A, RXF09/12A

