



Submittal Data Sheet

1/2 Ton Wall Mounted Unit - R-32

CTXV07AVJU9

FEATURES

- High Wall Mount Small capacity
- Sound pressure as low as 19 dB(A)
- Washable Dry Filter
- Powerful Operation mode
- Auto fan speed control
- Quick warming function

BENEFITS

- 12 year limited parts warranty with registration
- Quiet operation
- 12 year limited parts and compressor warranty with online registration 5 year limited parts warranty for commercial applications"
- Factory installed WiFi module





Submittal Data Sheet

1/2 Ton Wall Mounted Unit - R-32

CTXV07AVJU9

ELECTRICAL

Power Supply (V/Hz/Ph):
*See Engineering Manuals for other voltages.

*208-230 / 60 / 1

PIPING

Gas Connection:
(inch)

3/8

Liquid Connection:
(inch)

1/4

Drain Connection:
(inch)

5/8

SPECIFICATIONS

COOLING - Airflow Rate (cfm):		COOLING - Sound Level (dBA):		HEATING - Airflow Rate (cfm):		HEATING - Sound Level (dBA):	
High:	332	High:	40	High:	332	High:	39
Med:	268	Med:	35	Med:	279	Med:	34
Low:	230	Low:	31	Low:	230	Low:	28
SuperLow:	166	SuperLow:	24	SuperLow:	194	SuperLow:	25
Dimensions (HxWxD) (in):		11-1/4 x 30-5/16 x 8-3/4		Net Weight (lb):		19	

Submittal Data Sheet




1/2 Ton Wall Mounted Unit - R-32

CTXV07AVJU9


DIMENSIONAL DRAWING

CTXV07AVJU9, FTXV09/12AVJU9


THE MARK (→) SHOWS PIPING DIRECTION

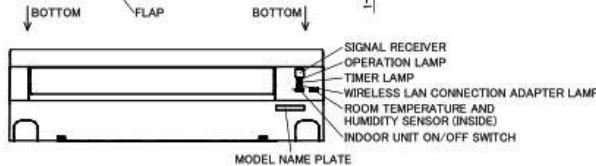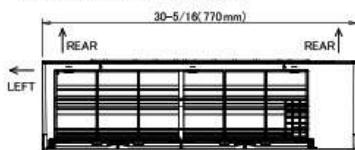


WIRELESS REMOTE CONTROLLER (ARC480A83)




BLADE ANGLE



REQUIRED SPACE

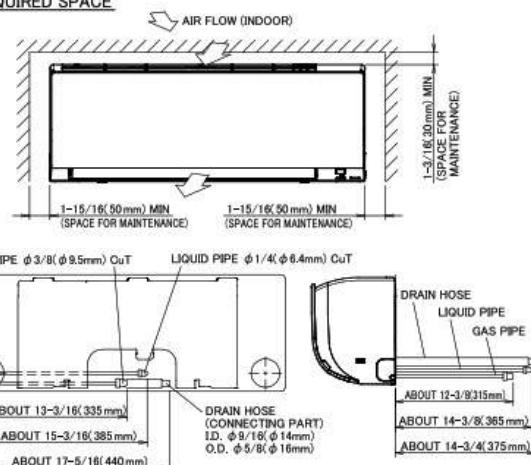

STANDARD LOCATIONS OF WALL HOLES

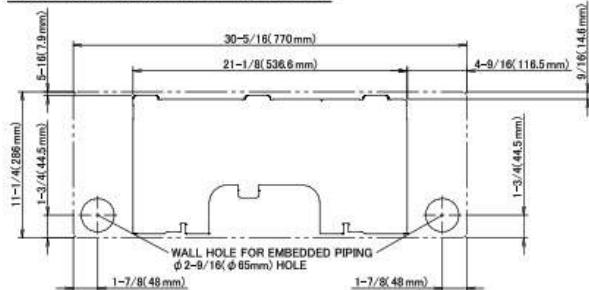

3D150958A