




## Submittal Data Sheet

10 Ton, 460V, VRV IV X HR

REYQ120XBYDA

### FEATURES

- Industry's first 3 phase VRF system to integrate with communicating gas furnaces.
- Design flexibility to enlarge system from single to dual module or dual to triple module without changes to installed main pipe sizes.
- Engineered with Daikin vapor injection compressor for optimized part load efficiencies.
- Hot gas defrost circuit with improved control logic allows installation without base pan heater.
- New service window provides quick access to multi-functional display and configuration buttons.
- Multi-functional display provides refrigerant pressures and temperatures eliminating the need to connect gauges during regular maintenance check.
- Easy commissioning with ability to program settings off site using configurator tool.
- Assembled in the US to increase flexibility and reduce lead times.
- Standard Limited Warranty: 10-year limited parts warranty.
- Compatible with Low Temperature (LT) Hydrobox and EEV Kit for DOAS with hot gas reheat capability

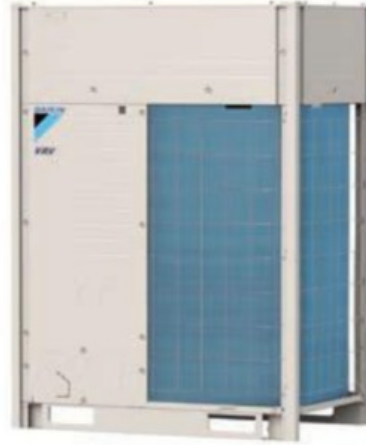

### BENEFITS

- Choice of gas furnace or heat pump heating for optimizing operational costs based on utility cost.
- Engineered to optimize capital on phased & tenant fit out commercial buildings.
- Year round comfort and energy savings with Variable Refrigerant Temperature technology (VRT).
- Modular and lightweight - enables flexibility in system layout and installation.
- Corrosion resistance 1000hr salt spray tested Daikin PE blue fin heat exchanger.
- Refrigerant cooled inverter technology keeps PCB cool independent of ambient temperature.
- Field performable Intermittent outdoor fan operation to help minimize snow accumulation on fan blades when the system is off.
- Backwards compatible with T-series Branch Selector boxes.



**Submittal Data Sheet**

10 Ton, 460V, VRV IV X HR

REYQ120XBYDA

PERFORMANCE

Outdoor Unit Model No.	REYQ120XBYDA	Outdoor Unit Name:	10 Ton, 460V, VRV IV X HR
Type:	Heat Recovery	Unit Combination:	
Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Rated Piping Length(ft):			
Rated Height Difference (ft):			
Rated Cooling Capacity (Btu/hr):	114,000	Rated Heating Capacity (Btu/hr):	114,000
Nom Cooling Capacity (Btu/hr):	119,000	Nom Heating Capacity (Btu/hr):	135,000
Cooling Input Power (kW):		Heating Input Power (kW):	
EER (Non-Ducted/Ducted):	10.60 / 10.80	Heating COP (Non-Ducted/Ducted):	3.5 / 3.5
IEER (Non-Ducted/Ducted):	20.00 / 17.80	Heating COP 17F (Non-Ducted/Ducted):	2.3 / 2.3
		SCHE (Non-Ducted/Ducted):	19.20 / 13.20

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	460 / 60 / 3	Compressor Stage:	Inverter
Power Supply Connections:	L1, L2, L3, Ground	Capacity Control Range (%):	11 - 100
Min. Circuit Amps MCA (A):	21.1	Capacity Index Limit:	-
Max Overcurrent Protection (MOP) (A):	25	Airflow Rate (H) (CFM):	7989
Max Starting Current MSC(A):		Gas Pipe Connection (inch):	1-1/8
Rated Load Amps RLA(A):		Liquid Pipe Connection (inch):	1/2
Dimensions (Height) (in):	66-11/16	H/L Pressure Connection (inch)	3/4
Dimensions (Width) (in):	48-7/8		
Dimensions (Depth) (in):	30-3/16	Sound Pressure (H) (dBA):	61
Net Weight (lb):	727	Sound Power Level (dBA):	
		Max. No. of Indoor Units:	20

