



Submittal Data Sheet

3.0-Ton R-32, 4-Port Heat Pump, Ductless ODU

4MXM36AVJU9

FEATURES

- Connect 2 to 4 indoor units with a single outdoor unit
- High-efficiency inverter driven swing compressor
- Cooling Operating Limit (14°~114.8°F/-10°~46°C)
- Heating Operating Limit (5°~59.9°F/-15°~15.5°C)
- Anti-corrosion treatment of outdoor heat exchanger
- Specialized drain pan design for improved cold climate drainage
- Pre Charged to 131.6ft (40 m)
- Night Quiet Mode
- Automatic Defrost
- Quick Warming Function
- Priority Room Setting
- Cool/Heat mode lock
- Unit performs self diagnosis and indicates results using LED lights
- Wiring error check function
- PAM Control



BENEFITS

- Single Fan allows for multiple installation locations
- 12 year residential limited parts and compressor warranty with online registration
- 5 Year limited parts warranty for commercial applications
- Long piping lengths, up to 230 ft
- High efficiency cooling and heating operation provides utility bill savings
- Multiple indoor unit style options available



Submittal Data Sheet

3.0-Ton R-32, 4-Port Heat Pump, Ductless ODU

4MXM36AVJU9

| EFFICIENCY | | | PERFORMANCE | | | |
|---|--------------------------|-------|---|---|----------------------|---|
| | SEER2 | EER2 | HSPF2 | COOLING: | | HEATING: |
| Non-Ducted: | 20.00 | 10.00 | 9.50 | Rated (Btu/hr): | 34,200 | Rated (Btu/hr): 34,600 |
| Mixed: | 10.00 | 5.00 | 4.75 | Operating Range: | 14°F - 115°F | Operating Range: 5°F - 60°F |
| | | | | Rated Cooling Conditions: | | Rated Heating Conditions: |
| | | | | Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75 | | Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43 |
| ELECTRICAL | | | PIPING | | | |
| Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages. | *208-230 / 60 / 1 | | Max. System Piping Length: (feet): | 230 | Gas Conn. (inch): | 3/8 |
| System MCA: (Min.circuit amps) | 24.1 | | Max. Interunit Piping Length: (feet): | 82 | Liquid Conn. (inch): | 1/4 |
| System MFA: (Max.fuse amps) | 25.0 | | Max. Height Difference IDU to ODU (feet): | 49.25 | Drain Conn. (inch): | 5/8 |
| Compressor RLA: (Rated load amps) | 18.5 | | Max. Height Difference IDU to IDU (feet): | 24.6 | | |
| Outdoor fan motor FLA: (Full load amps) | 0.49 | | Refrigerant Pre-Charged Pipe Length (ft): | 131.25 | | |
| Outdoor fan motor W: (Rated output watts) | 150.0 | | | | | |
| SPECIFICATIONS | | | | | | |
| Compressor Type: | Swing | | Compressor Stage: | Inverter | | |
| Refrigerant Type: | R-32 | | Refrigerant Oil: | PVE (FVC50K) | | |
| Factory Charge (Lbs): | 4.9 | | Additional Refrigerant Charge (Ozs/ft): | 0.22 | | |
| COOLING - Airflow Rate (cfm): | | | | HEATING - Airflow Rate (cfm): | | |
| High: | 2,896 | | High: | 2,518 | | |
| Med: | 2,402 | | Med: | 2,518 | | |
| Low: | 2,055 | | Low: | 1,070 | | |
| Sound Level (dBA): | 56 | | Sound Level (dBA): | 60 | | |
| Dimensions (HxWxD) (in): | 29-1/2 x 34-1/4 x 12-5/8 | | Net Weight (lb): | 142 | | |

Daikin North America LLC, 19001 Kermier Rd, Waller, TX 77484

Daikin City Generated Submittal Data

www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)

Submittal Date: 12/1/2025 3:31:16 PM

Page 2 of 0


Submittal Data Sheet

3.0-Ton R-32, 4-Port Heat Pump, Ductless ODU

4MXM36AVJU9

DIMENSIONAL DRAWING

4MXM36AVJU9

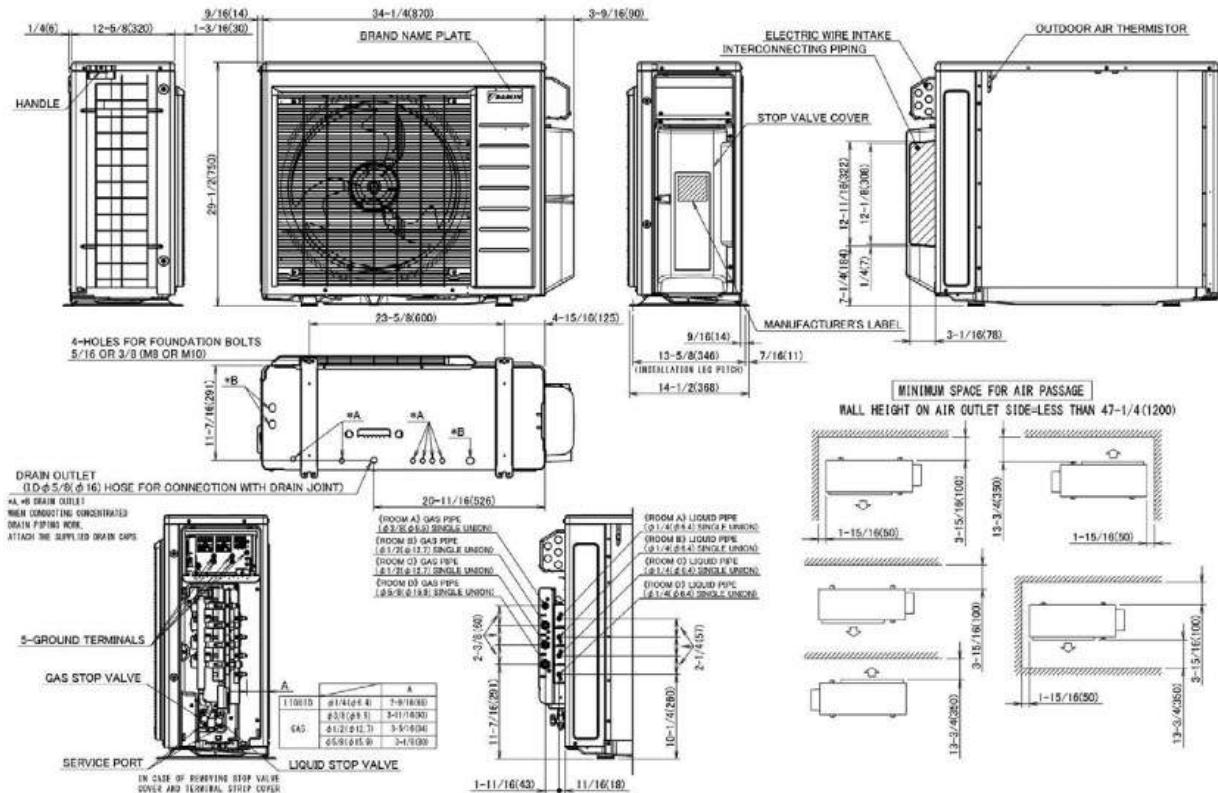

3D149809