

AURORA 4 port hp, ductless od 3 Ton 4MXL36WVJU9

### **FEATURES**

- High-efficiency inverter driven swing compressor
- "4 Zone enhanced Capacity Multi-Zone Night Quiet Mode Automatic Defrost Quick Warming Function Automatic Defrosting Priority Room Setting Cool/Heat mode lock Self Diagnosis Wiring error check function Anti-corrosion treatment of outdoor heat exchanger"

### **BENEFITS**

- 12 Year limited parts warranty with online registration
- PAM control Energy efficient operation Quiet outdoor unit operation Unit perfroms self diagnosis and indicates using LED lights"





AURORA 4 port hp, ductless od 3 Ton 4MXL36WVJU9

EFFICIENCY					PERFORMANCE		
	SEER2	EER2	HSPF2	СОР	COOLING:	HEATING:	
Non-Ducted:	20.00	11.70	9.00	4.26	Rated (Btu/hr): 34,400	Rated (Btu/hr): 36,600	
Ducted:	15.90	9.30	8.10	3.30	Operating 14°F - 115°F Range:	Operating -13°F - 60°F Range:	
Mixed:	17.95	10.50	8.55	3.78	Rated Cooling Conditions:	Rated Heating Conditions:	
					Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43	

ELECTRICAL		PIPING			
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.	*208-230 / 60 / 1	Max. System Piping Length: (feet):	230	Gas Conn. (inch):	3/8
System MCA: (Min.circuit amps)	30.2	Max. Interunit Piping Length: (feet):	230	Liquid Conn. (inch):	1/4
System MFA: (Max.fuse amps)	35.0	Max. Height Difference IDU to ODU (feet):	49.25	Drain Conn. (inch):	1
Compressor RLA: (Rated load amps)	27.0	Max. Height Difference IDU to IDU (feet):	98		
Outdoor fan motor FLA: (Full load amps)	0.8	Refrigerant Pre-Charged Pipe Length (ft):	131.2		
Outdoor fan motor W: (Rated output watts)	126.0				

SPECIFICATIONS					
Compressor Type:	Swing	Compressor Stage:	Inverter		
Refrigerant Type:		Refrigerant Oil:	PVE (FVC50K)		
Factory Charge (Lbs):	8.60	Additional Refrigerant Charge (Ozs/ft):	0.21		
COOLING - Airflow Rate (cfm):		HEATING - Airflow Rate (cfm):			
High:	3,684	High:	3,356		
Med:	3,029	Med:	3,138		
Low:	2,756	Low:	1,500		
Sound Level (dBA):	53	Sound Level (dBA):	55		
Dimensions (HxWxD) (in):	34-1/4 x 43-5/16 x 18-1/8	Net Weight (lb):	214		

Daikin North America LLC, 19001 Kermier Rd, Waller, TX 77484


www.daikinac.com www.daikincomfort.com



AURORA 4 port hp, ductless od 3 Ton 4MXL36WVJU9

### **DIMENSIONAL DRAWING**

# 4MXL36WVJU9, 4MXLH36WVJU9

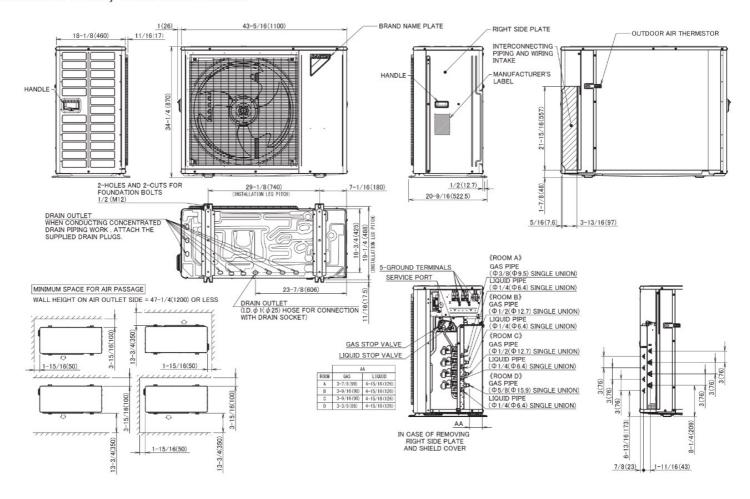

Page 3 of 4



AURORA 4 port hp, ductless od 3 Ton 4MXL36WVJU9

# **ACCESSORIES**

PART NUMBER	DESCRIPTION	INCLUDED
DACA-WB-3	Powder-Coated Wall-Mounted Bracket	No
KEH082A41A	Daikin TBM Drain Pan Heater 4MXL, 5MXS	No
KKG082A41	Back protection wire net 4MXL, 5 MXS	No
KPW082A41	Air direction adjustment grille	No

Page 4 of 4